


Y-Beam™ Technology for High Speed High Speed, Ultra-Low-Profile Connectors


OVERVIEW

Neoconix's Y-Beam™ technology is a new extension of PCBeam™ technology that was specifically developed for ultra-high-speed (28-56Gbps+) and ultra-low-profile (0.40mm) applications. Leveraging nearly all of the same customization options as Neoconix's PCBeam™ technology, the Y-Beam™ offerings are available with extensive customizability and low NRE. Implementations can include onboard optical modules, high speed flex-to-board connections, and other interconnects requiring high speed, high power, and an ultra-low profile.

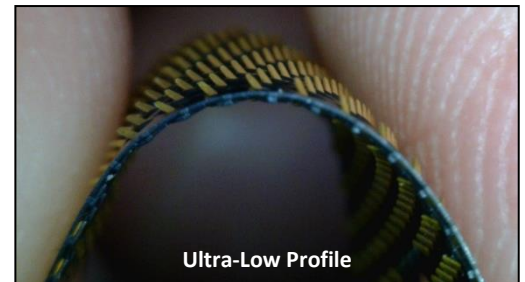


FEATURES

- High speed to 56+Gbps
- Most common options at 1.0mm x 1.0mm or 0.8mm x 1.27mm pitch, with additional customization possible
- Ultra-low-profile mated thickness of 0.40 mm
- Extensive customization in size, footprint, pitch, and pin count
- Current capacity to 1.5A per position
- Quick turn options available with customization (<4wks LT)
- Compliant with ROHS 2011/65/EU and IPC-4101B (halogen-free)

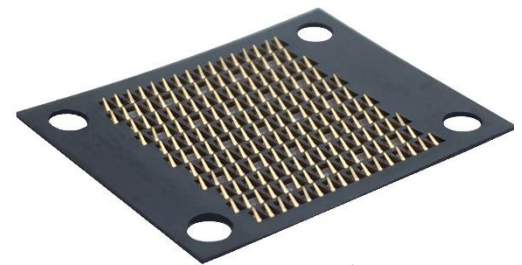

Example: 176 Position

SIGNAL INTEGRITY

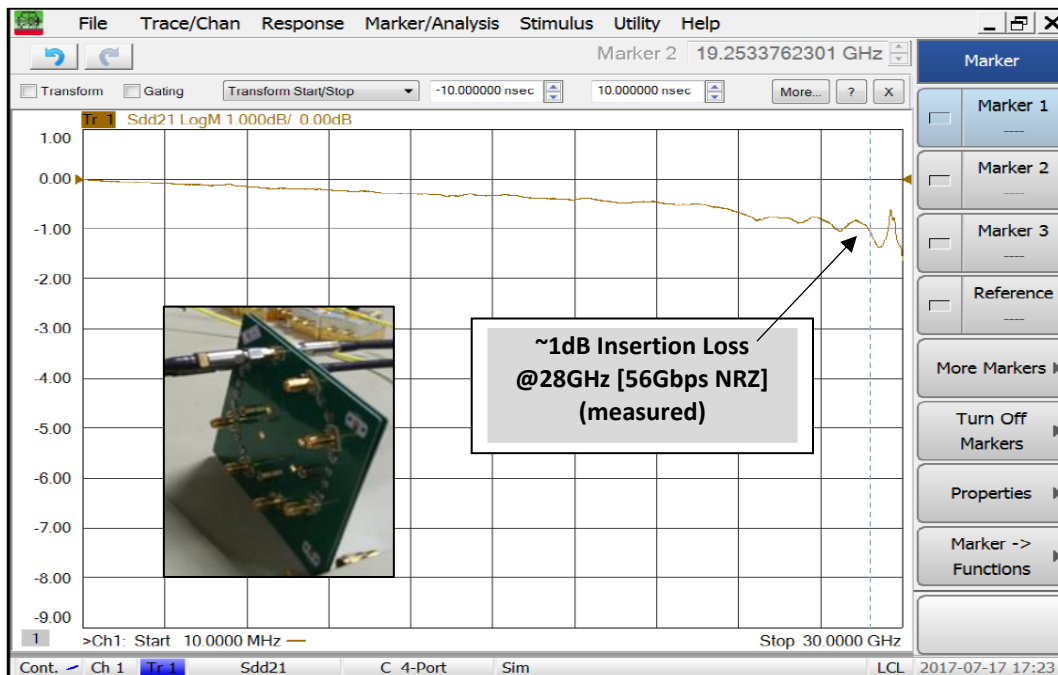

FOR MORE INFORMATION

Neoconix, Inc., 4020 Moorpark Ave, #108., San Jose, CA 95117. Web: www.neoconix.com E: sales@neoconix.com P: 408.530.9393